




# Constant Flow Handline Nozzle 95 GPM

## Features

- Brass Construction
- Standard optimum operating pressure 100 PSI
- 1-1/2" FNST Inlet
- Constant single flow
- Combination of fog and straight stream
- Large rubber bumper
- Large rubber handle
- Removable pistol grip
- Flush mechanism
- Durable chrome plated ball shut off
- Heavy-duty spinning teeth for powerful fog pattern
- Dual trunion drive on ball shut off
- Conforms to all aspects of NFPA 1964 Standards

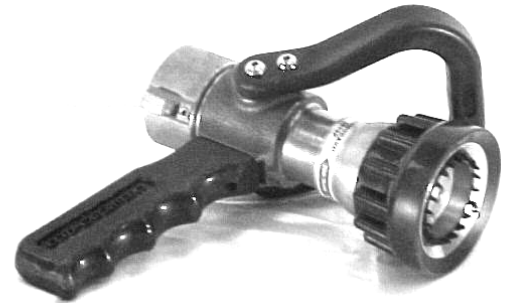

## Suitable

- Suitable with water, In-line Eductors, AFFF, AR-AFFF and Class "A" foam solutions
- Refineries, Offshore Platforms, Chemical Plants, Storage Facilities, Fire Department and more

## Accessories

- Repair Kit Part #RK1006B
- Quick Clamp-On Foam Tube Part #CFT

| Part No:   | GPM | Inlet     | Weight   | Length | Material |
|------------|-----|-----------|----------|--------|----------|
| SB95       | 95  | 1.5" FNST | 7.5 LBS. | 9 IN.  | BRASS    |
| *SB95P     | 95  | 1.5" FNST | 7.5 LBS. | 9 IN.  | BRASS    |
| *SB95NPSHP | 95  | 1.5" NPSH | 7.5 LBS. | 9 IN.  | BRASS    |

\*Pistol Grip

**CHEMGUARD**  
 204 S. 6<sup>th</sup> Ave • Mansfield, Tx 76063 • (817) 473-9964 • (817) 473-0606  
[www.chemguard.com](http://www.chemguard.com)

**CHEMGUARD**  
204 S. 6<sup>th</sup> Ave • Mansfield, Tx 76063 • (817) 473-9964 • FAX (817) 473-0606  
[www.chemguard.com](http://www.chemguard.com)