

### FEATURES

- Long throw range
- Good foam quality due to special nozzle
- Stainless steel
- Very compact

### Application

- Fire brigades
- Petrochemical plants
- Tank farms
- Loading areas
- Chemical plants

### Recommended Foam Concentrates

- Fluoroprotein 3% or 6%
- Protein 3% or 6%
- FFFP 3% or 6%
- AR-FFFP 3x6 or 3x3
- AFFF 1%, 3% or 6%
- AR-AFFF 3x6 or 3x3
- Multi purpose foam


### Operation

The branchpipe should be connected to the hose-line. To start foam application, open the ball valve. It is also necessary to flush the branchpipe with clear water after every use.

### Options

The LX 200 could be delivered with the following options:

- Storz couplings
- BS-couplings

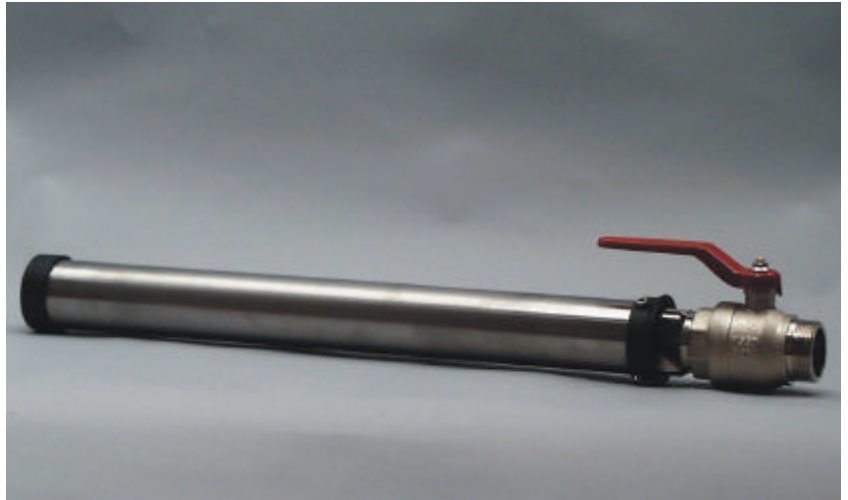

The LX 200 foam branchpipe produces low expansion foam of high quality. The quality is generated by the optimal air inlet nozzle. The advantage of low expansion is the long throw range and the excellent cooling effect. The stainless steel construction gives optimised protection against corrosion.

### Technical data

Nominal water flow	200 lpm
Operating pressure	5 bar
Expansion rate approx	15
Quantity of foam/min	Approx. 3 m <sup>3</sup>
External coupling thread	1¼" BSP FM
Throw range	26 meters
Material	Stainless steel
Length	600 mm
Diameter	50 mm
Weight	1.6 kg
Part no.	20-1000-00



*Optimized air inlet gives good foam quality.*